

SAFETY VALVE 安全阀

A60



A60S
FOR 1/2" PIPE



A60U
FOR 3/4" PIPE



A60U2
FOR 1/2" PIPE



A62



A62V



A62U
FOR 3/4" PIPE



A62VU
FOR 3/4" PIPE



A62U2
FOR 1/2" PIPE



A63



A63V



SAFETY VALVE 安全阀

A12-1



AH24-C



ABCE



A25-TT



A25-RT



A25-FT



AH72-C



AH80-C



AH90-C



A10



A20



VALVE · MANIFOLD 阀 · 主瓦斯管

TOP BURNER VALVE 开关阀/三段阀

A50



A17



AR19



AN22-1



A50U2



A18



A18S



PILOT SHUT OFF VALVE 火种阀

HIGH CAPACITY VALVE 高流量阀



A23



AP5-STRAIGHT AP5-直型

PART NO 品号	MALE PIPE 进气口	TUBE SIZE 出气口
AP5-1	1/8 NPT	3/16 CC
AP5-2	1/8 NPT	1/4 CC
AP5-3	3/16 CC	3/16 CC
AP5-4	1/4 CC	1/4 CC

WOK VALVE 中国炉具阀

AW5



AP6-DUAL OUTLET AP6-双出口

PART NO 品号	MALE PIPE 进气口	TUBE SIZE 出气口
AP6-1	1/8 NPT	3/16 CC
AP6-2	1/8 NPT	1/4 CC

AW10



AP7-ANGLE AP7-L型

PART NO 品号	MALE PIPE 进气口	TUBE SIZE 出气口
AP7-1	1/8 NPT	3/16 CC
AP7-2	1/8 NPT	1/4 CC

AW20



A30



AW3

MANIFOLD 主瓦斯管

CUSTOMER'S DESIGN IS WELCOME 依客户需求订制



* Please visit website for more types 请参阅网站 *

SOLENOID VALVE 电磁阀

► Double Solenoid with Regulator 调压控制双电磁阀

Regulator Adjustment Range 调压范围 Range of Regulations 功率范围

Natural Gas 天然气: 2.5"~ 5.4" W.C. 5,000~40,000 BTU/hr

L.P. Gas 液化瓦斯: 7.0"~12.0" W.C. 7,500~65,000 BTU/hr

Rated Pressure 进气压力: 1/2" Psi

Ambient Temperature Rating

环境温度: 32°F~155°F; 0°C~80°C

Pipe Sizes 管径尺寸

Inlet 进气口: 3/8" MNPT

Outlet 出气口: 1/4", 3/8" MNPT

Pilot Outlet 火种出气口: 1/8" MNPT

Solenoid 电磁阀

Rated Voltage 额定电压

12 VDC、24 VDC

24 VAC、120VAC、240 VAC

Frequency 频率: 50 Hz/60 Hz



AS02



◀ Single Solenoid 单电磁阀

Capacity natural gas, 3/8" MNPT 天然气流量 119,000 BTU

Rated Pressure: 进气压力: 1/2" PSI

Ambient Temperature Rating

环境温度: -4°F~275°F; -20°C~135°C

Pipe Sizes 管径尺寸

Inlet 进气口: 3/8" MNPT

Outlet 出气口: 3/8" MNPT

Pilot Outlet 火种出气口: 1/8" MNPT

Solenoid 电磁阀

Rated Voltage 额定电压:

24VAC、120VAC、240VAC

Frequency 频率: 50Hz/60Hz

► Double Solenoid 双电磁阀

Capacity natural gas 天然气流量, 3/8" NPT

110,000 BTU (Single) 单出口

Rated Pressure 进气压力: 1/2" Psi

Ambient Temperature Rating

环境温度: -4°F~275°F; -20°C~135°C

Pipe Sizes 管径尺寸

Inlet 进气口: 3/8" MNPT

Outlet 出气口: 3/8" MNPT


Pilot Outlet 火种出气口: 1/8" MNPT

Solenoid 电磁阀

Rated Voltage 额定电压:

24VAC、120VAC、240VAC

Frequency 频率: 50Hz/60Hz

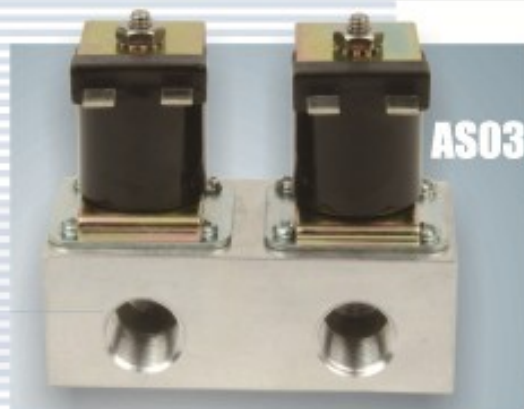

HEATING CONTROLS

(COMBINATION GAS VALVE)复合阀

加温控制器

REGULATOR SETTING 调压设定

NATURAL GAS 天然气 : 3.5" W.C. LPG 液态瓦斯: 10" W.C.

AMBIENT TEMPERATURE RATING 环境温度: 170°F

INLET/OUTLET 进气口/出气口 : 1/2"-3/4"

LINE VOLTAGE COMBINATION GAS VALVE

交流电瓦斯控制器

120 VAC 240VAC



BLEED GAS DIAPHRAGM VALVE

THERMOCOUPLE SAFETY

瓦斯排放安全控制器

MILLIVOLT COMBINATION GAS VALVE

微电流瓦斯控制器

250-750MV



COMBINATION GAS VALVE

FOR DIRECT PILOT IGNITION SYSTEM

直接点火瓦斯控制器

24VAC



COMMERCIAL ELECTRIC THERMOSTAT 电子恒温器


AG (THERMOSTAT 恒温器)

3/8. pipe in and out 进气/出气 3/8"管径 30,000 BTU/HR
7/16. tubing in and out 进气/出气 7/16"管径 30,000 BTU/HR
1/4. tubing in and out 进气/出气 1/4"管径 9,000 BTU/HR
Temperature range 温度范围: 150~550°F; 65~300°C



AK (THERMOSTAT 恒温器)

Temperature range 温度范围: 150~550°F; 65~300°C
Option parts: Auxiliary switch
选配件: 附属开关

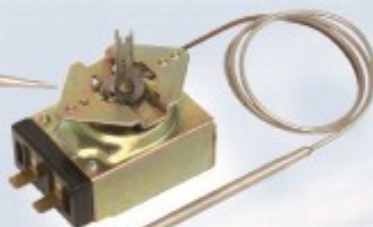

ALCC (THERMOSTAT WITH AUTO RESET LIMIT SWITCH 自动复归过温保护恒温器)

Temperature: any point under 600°F (300°C)
温度: 600°F (300°C) 以下任一点

AR (THERMOSTAT 恒温器)

Temperature range 温度范围: 150~550°F; 65~300°C



ALCH (THERMOSTAT WITH MANUAL RESET LIMIT SWITCH 手动复归过温保护恒温器)

Temperature: any point under 600°F (300°C)
温度: 600°F (300°C) 以下任一点

THERMOSTAT WITH SAFETY CONTROL

安全控制恒温器

ABJC

TEMPERATURE RANGE

温度范围: 150-400;250-500;250-550 °F
65-200;100-250;100-300 °C

OPTION PARTS: KNOB

选配件: 旋钮



A65T

TEMPERATURE RANGE

温度范围: 150-400;250-500;250-550 °F
65-200; 100-250; 100-300 °C

OPTION PARTS: KNOB, INLET FITTINGS,
OUTLET FITTINGS, PILOT FITTING

选配件: 旋钮, 入气接头, 出气接头, 母火接头

THERMOSTAT 恒温器

ABJ

TEMPERATURE RANGE

温度范围: 150-400;250-500;250-550 °F
65-200; 100-250; 100-300 °C

OPTION PARTS: KNOB, BEZEL

选配件: 旋钮, 旋钮座



SAFETY CONTROL 安全控制阀

ATS-11

ATS11-J TYPE: WITH PILOT IN
ATS11-K TYPE: WITHOUT PILOT IN



ALPHA BRASS CONTROLS INC. 达理股份有限公司

TAIWAN 台湾

[http:// www.alpha brass.com](http://www.alpha brass.com)

E-mail: info@alpha brass.com TEL: +886-4-26271407 FAX: +886-4-26265563

USA 美国

<http://www.alpha controls.us>

E-mail: kc@alpha brasscorp.com TEL: +1-704-5525982 FAX: +1-704-5525984

