



100 RegO Drive PO Box 247 Elon, NC 27244 USA Phone (336) 449-7707 Fax (336) 449-6594 www.regoproducts.com

PU 8530/AA8530 Series 11/2014

New from RegO® 8530/AA8530 Series ASME Rated Delta Port Relief Valve Manifolds

Application


Designed especially for use as a primary relief device on large stationary pressurized storage containers, the base is supplied with a two inch NPT threaded container connection. These manifolds incorporate an additional relief valve, not included in the flow rating, allowing for servicing or replacement of any one of the relief valves without evacuating the container. The hand-wheel on the manifold selectively closes off the entrance port to the relief valve being removed while the remaining relief valves provide protection for the container and its contents. All manifold flow ratings are based on flow through the relief valves after one has been removed for service or replacement*

Materials

Body..... Ductile Iron
Resilient Parts..... Teflon
Clapper Disc.....Stainless Steel
Bleeder Valve..... Stainless Steel

Relief Valve Materials

Body (3135).....Brass
Spring Guide (3135).....Brass
Body (AA3135)Aluminum
Spring Guide (AA3135).....Aluminum
Spring (3135 & AA3135)...Stainless Steel
Seat Disc (3135 & AA3135).... Resilient Synthetic Rubber

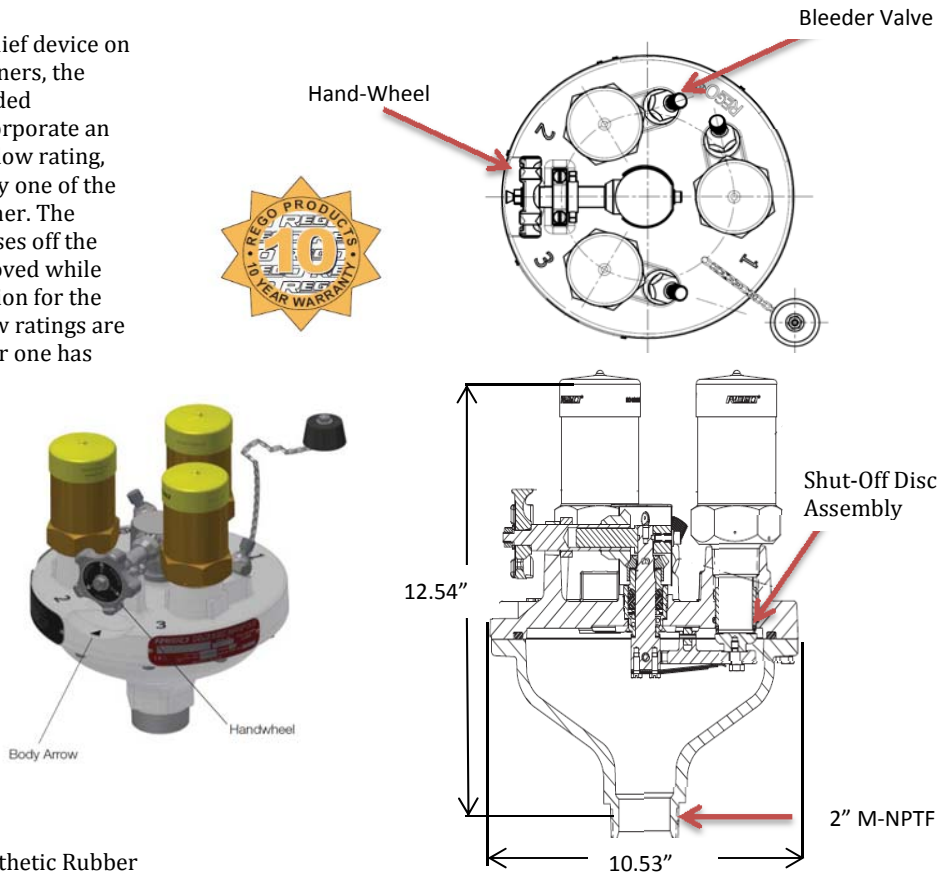

Part Number	Start to Discharge Setting PSIG**	Application		Container Connection M-NPTF	Relief Valve			ASME Flow Rating SCFM (air) @ 120% of Set Pressure *	
		LPG	NH3		Qty.	Part Number	Inlet Connection M-NPT		Accessories Pipe-away Adapter***
8532AG	250	Yes	No	2"	2	3135MG	1-1/4"	3135-10	5,549 (1)
8533AG	250	Yes	No		3				11,098 (2)
AA8532MA250	250	No	Yes		2				6,341 (1)
AA8533MA250	250	No	Yes		3	AA3135MA250	1-1/4"	AA3135-10	12,682 (2)
AA8532MA265	265	No	Yes		2	6,615 (1)			
AA8533MA265	265	No	Yes		3	AA3135MA265			13,230 (2)

* Flow rating based on number of relief valves indicated in parenthesis ().

Flow rates shown are for bare relief valves. Adapters and pipe-aways will reduce flow rates as discussed in forwarding information in L-500 catalog.

**Other pressure settings available.

*** 2" F. NPT outlet connection on adapters.

